
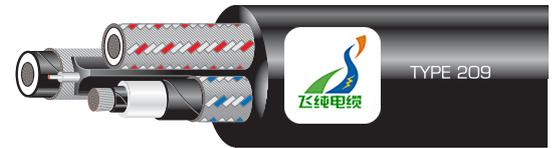




TYPE 209 1.1 to 11kV

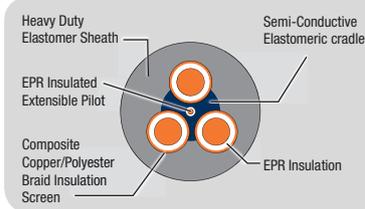

A trailing cable used as a flexible feeder to machinery. Smaller conductor sizes may also be used for equipment such as drills, pumps, etc.

Type	Part No.	Voltage	Conductor Size mm ²	Conductor Dia. mm	Screen Area (each) mm ²	Diameter Over Screen mm	Pilot Conductor Size mm ²	Pilot Diameter mm	Sheath Thickness mm	Approx. Cable Diameter mm	Approx. Weight kg/100m
209.1	MCU-209.1-006	1.1kV	6	7.2	7.2	10	0.75	2.7	3.8	31.9	131
	MCU-209.1-010	1.1kV	10	8.1	8.6	10.9	0.75	2.7	3.8	33.8	155
	MCU-209.1-016	1.1kV	16	9.3	9.6	12.2	0.75	2.7	4	36.9	192
	MCU-209.1-025	1.1kV	25	10.6	11.3	13.5	0.75	2.7	4.3	40.3	242
	MCU-209.1-035	1.1kV	35	11.8	12.4	14.7	1.25	3.1	4.6	43.5	295
	MCU-209.1-050	1.1kV	50	13.6	14.4	16.4	1.25	3.1	5	48	375
	MCU-209.1-070	1.1kV	70	15.4	16.5	18.3	1.25	3.1	5.4	52.8	472
	MCU-209.1-095	1.1kV	95	17.6	18.2	20.5	1.25	3.1	6	58.8	601
	MCU-209.1-120	1.1kV	120	19.4	20.3	22.3	1.25	3.1	6.4	63.5	719
	MCU-209.1-150	1.1kV	150	21.5	22.3	24.4	1.25	3.1	6.9	69	864
209.3	MCU-209.3-016	3.3kV	16	13.7	13.4	16.3	0.75	2.7	5.3	52.7	326
	MCU-209.3-025	3.3kV	25	15	14.8	17.6	0.75	2.7	5.6	56.1	386
	MCU-209.3-035	3.3kV	35	16.2	16.1	18.8	1.25	3.1	5.9	59.3	448
	MCU-209.3-050	3.3kV	50	17.8	17.5	20.3	1.25	3.1	6.3	63.4	535
	MCU-209.3-070	3.3kV	70	19.4	19.6	22	1.25	3.1	6.6	67.6	636
	MCU-209.3-095	3.3kV	95	21.2	20.6	23.8	1.25	3.1	7.1	72.5	764
	MCU-209.3-120	3.3kV	120	22.8	27.2	25.8	1.25	3.1	7.4	77.2	900
	MCU-209.3-150	3.3kV	150	24.5	39.6	27.5	1.25	3.1	7.8	81.6	1069
209.6	MCU-209.6-016	6.6kV	16	17.7	16.3	20.3	0.75	2.7	6.4	63.5	465
	MCU-209.6-025	6.6kV	25	19	18.3	21.6	0.75	2.7	6.7	66.9	534
	MCU-209.6-035	6.6kV	35	20.2	20.3	22.8	1.25	3.1	7	70.1	603
	MCU-209.6-050	6.6kV	50	21.8	20.3	24.3	1.25	3.1	7.3	74	695
	MCU-209.6-070	6.6kV	70	23.4	22.6	26	1.25	3.1	7.7	78.4	810
	MCU-209.6-095	6.6kV	95	25.2	29.6	28.2	1.25	3.1	8.1	83.8	962
	MCU-209.6-120	6.6kV	120	26.8	32.3	29.8	1.25	3.1	8.5	88	1097
	MCU-209.6-150	6.6kV	150	28.5	47.3	32.4	1.25	3.1	8.9	93.7	1287
209.11	MCU-209.11-025	11kV	25	24.2	24.3	26.8	0.75	2.7	8.1	81	762
	MCU-209.11-035	11kV	35	25.4	30.3	28.4	1.25	3.1	8.4	84.8	858
	MCU-209.11-050	11kV	50	27	32.3	30	1.25	3.1	8.7	88.7	963
	MCU-209.11-070	11kV	70	28.6	34.3	31.6	1.25	3.1	9.1	93.1	1092
	MCU-209.11-095	11kV	95	30.4	48.3	34.3	1.25	3.1	9.6	99.3	1290

TYPE 210 1.1kV

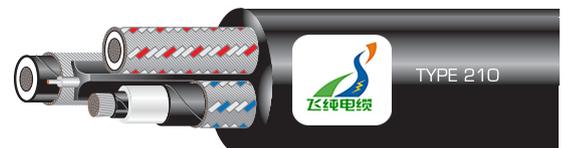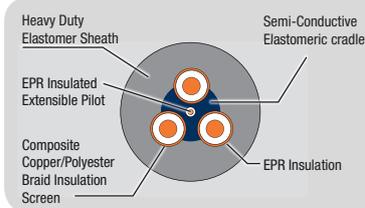

A small cable for hand held equipment such as drills and boring machines.

Type	Part No.	Voltage	Conductor Size mm ²	Conductor Dia. mm	Screen Area (each) mm ²	Diameter Over Screen mm	Pilot Conductor Size mm ²	Pilot Diameter mm	Sheath Thickness mm	Approx. Cable Diameter mm	Approx. Weight kg/100m
210.1	MCU-210.1-0015	1.1kV	1.5	5.3	6	7	0.75	2.7	3	26.1	83
	MCU-210.1-0025	1.1kV	2.5	5.9	6	7.6	0.75	2.7	3	27.6	92