



Section 1

Mining Cables to AS/NZS 1802:2003

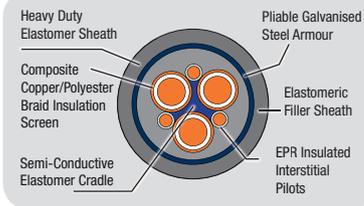

TYPE 260 1.1 to 11kV

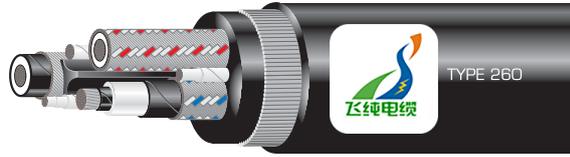

A pliable armoured cable used as a feeder in areas where high impact resistance is required.

Type	Part No.	Voltage	Conductor Size mm ²	Conductor Dia. mm	Screen Area (each) mm ²	Diameter Over Screen mm	Pilot Conductor Size mm ²	Pilot Diameter mm	Sheath Thickness mm	Approx. Cable Diameter mm	Approx. Weight kg/100m
260.1	MCU-260.1-006	1.1kV	6	8.5	7.2	10.2	1.06	3.3	3.8	42.2	246
	MCU-260.1-010	1.1kV	10	9.4	8.6	11.1	1.7	3.7	3.8	44.1	295
	MCU-260.1-016	1.1kV	16	10.6	9.6	12.3	2.76	4.2	4	49.8	410
	MCU-260.1-025	1.1kV	25	11.9	11.3	13.6	4.45	5.2	4.3	53.3	495
	MCU-260.1-035	1.1kV	35	13.1	12.4	14.8	6.15	5.6	4.6	56.4	576
	MCU-260.1-050	1.1kV	50	14.9	14.4	16.6	8.06	6.1	5	60.9	679
	MCU-260.1-070	1.1kV	70	16.7	16.5	18.4	12.69	7.1	5.4	65.8	837
	MCU-260.1-095	1.1kV	95	18.9	18.2	20.6	12.69	7.1	6	75	1003
	MCU-260.1-120	1.1kV	120	20.7	20.3	22.4	13.75	7.6	6.4	79.7	1176
	MCU-260.1-150	1.1kV	150	22.8	22.3	24.5	16.92	8.2	6.9	85.1	1372
260.3	MCU-260.3-016	3.3kV	16	13.4	13.4	15.1	2.76	5	5.3	62.8	566
	MCU-260.3-025	3.3kV	25	14.7	14.8	16.4	4.45	5.6	5.6	66.2	661
	MCU-260.3-035	3.3kV	35	15.9	16.1	17.6	6.15	6	5.9	72.6	779
	MCU-260.3-050	3.3kV	50	17.5	17.5	19.2	8.06	6.5	6.3	76.7	886
	MCU-260.3-070	3.3kV	70	19.1	19.6	20.8	12.69	7.5	6.6	80.9	1044
	MCU-260.3-095	3.3kV	95	20.9	20.6	22.6	12.69	7.5	7.1	85.8	1156
	MCU-260.3-120	3.3kV	120	22.5	27.2	24.5	13.75	8	7.4	90.5	1350
	MCU-260.3-150	3.3kV	150	24.2	39.6	26.2	16.92	8.6	7.8	99.1	1779
260.6	MCU-260.6-016	6.6kV	16	17.4	16.3	19.1	2.76	5	6.4	76.9	796
	MCU-260.6-025	6.6kV	25	18.7	18.3	20.4	4.45	5.6	6.7	80.3	897
	MCU-260.6-035	6.6kV	35	19.9	20.3	21.6	6.15	6.4	7	83.5	990
	MCU-260.6-050	6.6kV	50	21.5	20.3	23.2	8.06	6.9	7.3	87.4	1102
	MCU-260.6-070	6.6kV	70	23.1	22.6	24.8	12.69	7.9	7.7	95.9	1456
	MCU-260.6-095	6.6kV	95	24.9	29.6	26.9	12.69	7.9	8.1	101.3	1610
	MCU-260.6-120	6.6kV	120	26.5	32.3	28.5	13.75	8.4	8.5	105.6	1807
	MCU-260.6-150	6.6kV	150	28.2	47.3	30.8	16.92	9	8.9	111.3	2080
260.11	MCU-260.11-025	11kV	25	23.9	24.3	25.6	4.45	6.8	8.1	98.5	1392
	MCU-260.11-035	11kV	35	25.1	30.3	27.1	6.15	7.2	8.4	102.4	1528
	MCU-260.11-050	11kV	50	26.7	32.3	28.7	8.06	7.7	8.7	106.2	1664
	MCU-260.11-070	11kV	70	28.3	34.3	30.3	12.69	8.7	9.1	110.6	1867
	MCU-260.11-095	11kV	95	30.1	48.3	32.7	12.69	8.7	9.6	116.9	2073



FEICHUN SPECIAL CABLES

Website Address www.feichuncables.com
 Whatsapp Account **+86 138 5608 5607 & +86 138 5512 3218**
 Email Address ziyu.huang@feichuncables.com & zihao.yang@feichuncables.com