
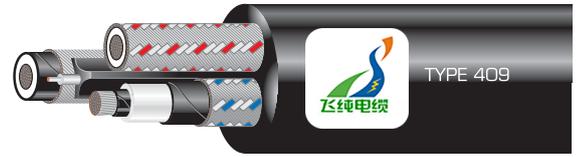


TYPE 409 1.1 to 22kV

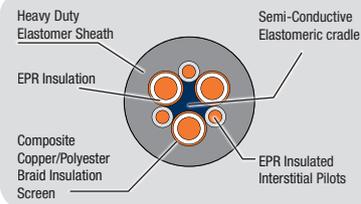

A trailing cable used as a flexible feeder to machinery. Smaller conductor sizes are used for hand held equipment such as drills, pumps, etc. Larger conductor sizes are used for shovels, draglines, etc.

Type	Part No.	Voltage	Conductor Size mm ²	Conductor Dia. mm	Screen Area (each) mm ²	Diameter Over Screen mm	Pilot Conductor Size mm ²	Pilot Diameter mm	Sheath Thickness mm	Approx. Cable Diameter mm	Approx. Weight kg/100m
409.1	MCO-409.1-025	1.1kV	25	10.6	11.5	13.5	0.75	2.7	4.3	44.8	255
	MCO-409.1-035	1.1kV	35	11.8	13	14.7	1.25	3.1	4.6	48.4	311
	MCO-409.1-050	1.1kV	50	13.6	15	16.4	1.25	3.1	5	53.4	395
	MCO-409.1-070	1.1kV	70	15.4	17	18.3	1.25	3.1	5.4	58.7	497
	MCO-409.1-095	1.1kV	95	17.6	22	20.5	1.25	3.1	6	66.1	644
	MCO-409.1-120	1.1kV	120	19.4	25	22.3	1.25	3.1	6.4	71.3	772
MCO-409.1-150	1.1kV	150	21.5	35	24.4	1.25	3.1	6.9	78.8	959	
409.3	MCO-409.3-025	3.3kV	25	15	14.8	17.6	0.75	2.7	5.6	56.1	386
	MCO-409.3-035	3.3kV	35	16.2	16.1	18.8	1.25	3.1	5.9	59.3	448
	MCO-409.3-070	3.3kV	70	19.4	19.6	22	1.25	3.1	6.6	67.6	636
	MCO-409.3-095	3.3kV	95	21.2	20.6	23.8	1.25	3.1	7.1	72.5	764
	MCO-409.3-120	3.3kV	120	22.8	27.2	25.8	1.25	3.1	7.4	77.2	900
	MCO-409.3-150	3.3kV	150	24.5	39.6	27.5	1.25	3.1	7.8	81.6	1069
409.6	MCO-409.6-025	6.6kV	25	19	18.3	21.6	0.75	2.7	6.7	66.9	534
	MCO-409.6-035	6.6kV	35	20.2	20.3	22.8	1.25	3.1	7	70.1	603
	MCO-409.6-050	6.6kV	50	21.8	20.3	24.3	1.25	3.1	7.3	74	695
	MCO-409.6-095	6.6kV	95	25.2	29.6	28.2	1.25	3.1	8.1	83.8	962
	MCO-409.6-120	6.6kV	120	26.8	32.3	29.8	1.25	3.1	8.5	88	1097
	MCO-409.6-150	6.6kV	150	28.5	47.3	32.4	1.25	3.1	8.9	93.7	1287
409.11	MCO-409.11-025	11kV	25	24.2	24.3	26.8	0.75	2.7	8.1	81	762
	MCO-409.11-035	11kV	35	25.4	30.3	28.4	1.25	3.1	8.4	84.78	858
	MCO-409.11-050	11kV	50	27	32.3	30	1.25	3.1	8.7	88.7	963
	MCO-409.11-070	11kV	70	28.6	34.3	31.6	1.25	3.1	9.1	93.1	1092
	MCO-409.11-120	11kV	120	31.7	51.3	34.3	1.25	3.1	9.9	105.3	1433
	MCO-409.11-150	11kV	150	33.4	54.3	36	1.25	3.1	10.3	110.5	1601
409.22	MCO-409.22-035	22kV	35	30.9	52.7	33.5	1.25	3.1	10	102.8	1225
	MCO-409.22-050	22kV	50	32.5	54.6	35.1	1.25	3.1	10.3	106.7	1349
	MCO-409.22-070	22kV	70	34.1	58.3	36.7	1.25	3.1	10.7	111.2	1501