Mining Cables to AS/NZS 2802:2000

TYPE 412
1.1kV

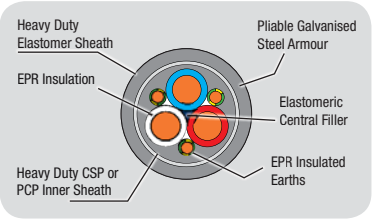

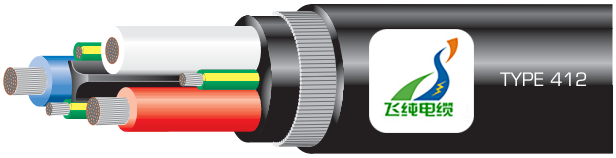

A pliable armoured cable used as a feeder in areas where high impact resistance is required.

Type	Part No.	Voltage	Conductor Size mm²	Conductor Dia. mm	Screen Area (each) mm²	Diameter Over Screen mm	Pilot Conductor Size mm²	Pilot Diameter mm	Sheath Thickness mm	Approx. Cable Diameter mm	Approx. Weight kg/100m
412.1	MCO-412.1-016	1.1kV	16	10.4	5.3	4.2			3.8	38.3	265
	MCO-412.1-025	1.1kV	25	10.3	5.3	4.2			3.8	38.4	294
	MCO-412.1-035	1.1kV	35	11.5	5.3	4.2			4	44.1	4020
	MCO-412.1-050	1.1kV	50	13.3	8.06	5.3			4.4	48.1	480
	MCO-412.1-070	1.1kV	70	15.1	12.69	6.3			4.8	54	627
	MCO-412.1-095	1.1kV	95	17.3	15.87	6.8			5.4	59.4	745
	MCO-412.1-120	1.1kV	120	19.1	20.1	7.9			5.8	68	990
	MCO-412.1-150	1.1kV	150	21.2	27.15	8.8			6.3	74.1	1186

FEICHUN SPECIAL CABLES
Website Address www.feichuncables.com
Whatsapp Account +86 138 5608 5607 & +86 138 5512 3218
Email Address ziyu.huang@feichuncables.com & zihao.yang@feichuncables.com