


**TYPE 440**  
**1.1 to 11KV**

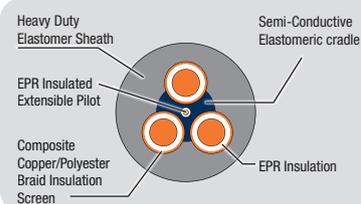

*A flexible trailing cable for power supply to mobile machinery and equipment.*

Type	Part No.	Voltage	Conductor Size mm <sup>2</sup>	Conductor Dia. mm	Screen Area (each) mm <sup>2</sup>	Diameter Over Screen mm	Pilot Conductor Size mm <sup>2</sup>	Pilot Diameter mm	Sheath Thickness mm	Approx. Cable Diameter mm	Approx. Weight kg/100m
<b>440.1</b>	MCO-440.1-025	1.1kV	25	10.6	11.3	12.3	4.45	5.2	4.3	40.8	277
	MCO-440.1-035	1.1kV	35	11.8	12.4	13.5	6.15	5.6	4.6	44	337
	MCO-440.1-050	1.1kV	50	13.6	14.4	15.3	85.06	6.1	5	48.5	424
	MCO-440.1-070	1.1kV	70	15.4	16.5	17.1	12.69	7.1	5.4	53.4	542
	MCO-440.1-095	1.1kV	95	17.6	18.2	19.3	12.69	7.1	6	59.4	687
	MCO-440.1-120	1.1kV	120	19.4	20.3	21.1	13.75	7.6	6.4	64.2	827
MCO-440.1-150	1.1kV	150	21.5	22.3	23.2	16.92	8.2	6.9	69.7	1013	
<b>440.3</b>	MCO-440.3-025	3.3kV	25	15	14.8	16.4	4.45	5.6	5.6	56.7	426
	MCO-440.3-035	3.3kV	35	16.2	16.1	17.6	6.15	6	5.9	59.9	497
	MCO-440.3-070	3.3kV	70	19.4	19.6	20.8	12.69	7.5	6.6	68.2	718
	MCO-440.3-095	3.3kV	95	21.2	20.6	22.6	12.69	7.5	7.1	73.2	852
	MCO-440.3-120	3.3kV	120	22.8	27.2	24.5	13.75	8	7.4	77.9	1000
	MCO-440.3-150	3.3kV	150	24.5	39.6	26.2	16.92	8.6	7.8	82.4	1189
<b>440.6</b>	MCO-440.6-025	6.6kV	25	19	18.3	20.4	4.45	5.6	6.7	67.6	552
	MCO-440.6-035	6.6kV	35	20.2	20.3	21.6	6.15	6.4	7	70.8	631
	MCO-440.6-050	6.6kV	50	21.8	21.3	23.2	8.06	6.9	7.3	74.7	728
	MCO-440.6-095	6.6kV	95	25.2	29.6	26.9	12.69	7.9	8.1	84.6	1010
	MCO-440.6-120	6.6kV	120	26.8	32.3	28.5	13.75	8.4	8.5	88.9	1153
	MCO-440.6-150	6.6kV	150	28.5	47.3	30.8	16.92	9	8.9	94.6	1352
<b>440.11</b>	MCO-440.11-025	11kV	25	24.2	24.1	25.6	4.45	6.8	8.1	81.8	788
	MCO-440.11-035	11kV	35	25.4	30.2	27.1	6.15	7.2	8.4	85.7	890
	MCO-440.11-050	11kV	50	27	32.2	28.7	8.06	7.7	8.7	89.6	1001
	MCO-440.11-070	11kV	70	28.6	34.6	30.3	12.69	8.7	9.1	94	1147
	MCO-440.11-120	11kV	120	31.7	51	34.3	13.75	9.2	9.9	104.3	1494
	MCO-440.11-150	11kV	150	33.4	54.5	36	16.92	9.8	10.3	108.8	1672
<b>440.22</b>	MCO-440.22-035	22kV	35	30.9	53.2	33.5	6.15	8.2	10	102.8	1270
	MCO-440.22-050	22kV	50	32.5	54.1	35.1	8.06	8.7	10.3	106.7	1392
	MCO-440.22-070	22kV	70	34.1	58	36.7	12.69	9.7	10.7	111.2	1558