


Section 2 Mining Cables to AS/NZS 2802:2000



TYPE 441 1.1 to 11KV

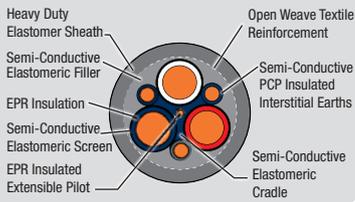

A cable suitable for trailing and reeling applications, such as draglines, drills, etc

Type	Part No.	Voltage	Conductor Size mm ²	Conductor Dia. mm	Screen Area (each) mm ²	Diameter Over Screen mm	Pilot Conductor Size mm ²	Pilot Diameter mm	Sheath Thickness mm	Approx. Cable Diameter mm	Approx. Weight kg/100m
441.1	MCO-441.1-006	1.1kV	6	8.5	2.12	2.9	0.75	2.7	3.8	30.1	104
	MCO-441.1-010	1.1kV	10	9.4	3.39	3.3	0.75	2.7	3.8	32	131
	MCO-441.1-016	1.1kV	16	10.6	5.3	4.2	0.75	2.7	4	35.1	171
	MCO-441.1-025	1.1kV	25	11.9	5.3	4.8	0.75	2.7	4.3	38.6	224
	MCO-441.1-035	1.1kV	35	13.1	5.3	5.2	1.25	3.1	4.6	41.8	272
	MCO-441.1-050	1.1kV	50	14.9	8.06	5.7	1.25	3.1	5	46.4	346
	MCO-441.1-070	1.1kV	70	16.7	12.69	6.7	1.25	3.1	5.4	51.2	468
	MCO-441.1-095	1.1kV	95	18.9	15.87	6.7	1.25	3.1	6	57.3	568
	MCO-441.1-120	1.1kV	120	20.7	20.1	6.8	1.25	3.1	66.4	62	706
	MCO-441.1-150	1.1kV	150	22.8	27.15	7.8	1.25	3.1	6.9	67.5	854
441.3	MCO-441.3-025	3.3kV	25	13.1	5.3	5	0.75	2.7	4.9	45.9	310
	MCO-441.3-035	3.3kV	35	14.3	5.3	5	1.25	3.1	5.2	49.1	638
	MCO-441.3-050	3.3kV	50	16.3	8.06	5.7	1.25	3.1	5.7	54.3	473
	MCO-441.3-070	3.3kV	70	17.9	12.69	6.7	1.25	3.1	6	58.5	585
	MCO-441.3-095	3.3kV	95	19.7	16.92	7.8	1.25	3.1	6.4	63.3	722
	MCO-441.3-120	3.3kV	120	21.3	21.15	8.4	1.25	3.1	6.5	67	844
	MCO-441.3-150	3.3kV	150	23	27.15	9.2	1.25	3.1	6.6	70.8	986
441.6	MCO-441.6-025	6.6kV	25	14.7	5.3	5	0.75	2.7	5.3	50.2	361
	MCO-441.6-035	6.6kV	35	15.9	5.3	5	1.25	3.1	5.6	53.4	422
	MCO-441.6-050	6.6kV	50	17.5	8.06	6.1	1.25	3.1	6	57.5	519
	MCO-441.6-070	6.6kV	70	19.1	12.69	7.1	1.25	3.1	6.3	61.8	634
	MCO-441.6-095	6.6kV	95	20.9	15.87	7.6	1.25	3.1	6.4	65.9	759
	MCO-441.6-120	6.6kV	120	22.5	20.1	8.3	1.25	3.1	6.6	69.8	888
	MCO-441.6-150	6.6kV	150	24.2	27.15	9.2	1.25	3.1	6.7	73.6	1035
441.11	MCO-441.11-025	11kV	25	18.7	5.3	5.4	0.75	2.7	6.3	60.9	509
	MCO-441.11-035	11kV	35	19.9	5.3	5.8	1.25	3.1	6.4	63.7	574
	MCO-441.11-050	11kV	50	21.5	8.06	6.5	1.25	3.1	6.5	67.2	668
	MCO-441.11-070	11kV	70	23.1	12.68	7.5	1.25	3.1	6.6	71	786
	MCO-441.11-095	11kV	95	24.9	15.87	8	1.25	3.1	6.8	75.4	926
	MCO-441.11-120	11kV	120	26.5	20.1	8.7	1.25	3.1	6.9	79	1059
	MCO-441.11-150	11kV	150	28.2	27.15	9.6	1.25	3.1	7	82.9	1215
441.22	MCO-441.22-035	22kV	35	25.1	5.73	6.7	1.25	3.1	6.9	76	782
	MCO-441.22-050	22kV	50	26.7	8.48	7.4	1.25	3.1	7	79.5	886
	MCO-441.22-070	22kV	70	28.3	13.75	8.4	1.25	3.1	7.1	83.3	1018



FEICHUN SPECIAL CABLES

Website Address www.feichuncables.com
 Whatsapp Account [+86 138 5608 5607](tel:+8613856085607) & [+86 138 5512 3218](tel:+8613855123218)
 Email Address ziyu.huang@feichuncables.com & zihao.yang@feichuncables.com