


Section 2

Mining Cables to AS/NZS 2802:2000

TYPE 455 1.1 to 11kV

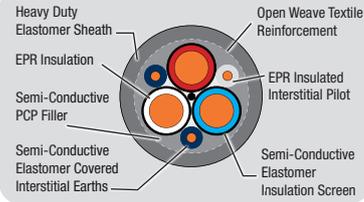

A cable used for slow reeling and trailing applications such as stacker reclaimers, draglines, etc. Designed for lower weight and minimum diameter.

Type	Part No.	Voltage	Conductor Size mm ²	Conductor Dia. mm	Pilot Conductor Size mm ²	Pilot Diameter mm	Sheath Thickness mm	Approx. Cable Diameter mm	Approx. Weight kg/100m
455.3	MCO-455.3-025	3.3kV	25	13.1	8.48	6.6	4.5	42.33	284
	MCO-455.3-035	3.3kV	35	14.3	8.48	6.6	4.8	45.87	343
	MCO-455.3-050	3.3kV	50	16.3	12.51	7.4	5.2	51.57	422
	MCO-455.3-070	3.3kV	70	17.9	19.04	8.5	5.7	56.44	549
	MCO-455.3-095	3.3kV	95	19.7	24.68	9.3	6.1	61.47	647
	MCO-455.3-120	3.3kV	120	21.3	29.62	10.3	6.4	65.49	784
	MCO-455.3-150	3.3kV	150	23	39.15	11.4	6.5	69.91	941
455.6	MCO-455.6-025	6.6kV	25	14.7	8.48	6.6	5	47.05	316
	MCO-455.6-035	6.6kV	35	15.9	8.48	7	5.3	50.6	382
	MCO-455.6-050	6.6kV	50	17.5	12.51	7.8	5.6	55.12	461
	MCO-455.6-070	6.6kV	70	19.1	19.04	8.9	6	59.98	588
	MCO-455.6-095	6.6kV	95	20.9	24.68	9.7	6.3	64.55	6796
	MCO-455.6-120	6.6kV	120	22.5	29.62	10.7	6.5	68.57	824
	MCO-455.6-150	6.6kV	150	24.2	39.49	11.8	6.6	72.77	975
455.11	MCO-455.11-025	11kV	25	18.7	8.48	7.8	6.1	59.1	451
	MCO-455.11-035	11kV	35	19.9	8.48	7.8	6.3	62.18	505
	MCO-455.11-050	11kV	50	21.5	12.51	8.6	6.4	66.01	583
	MCO-455.11-070	11kV	70	23.1	19.04	9.7	6.5	70.18	716
	MCO-455.11-095	11kV	95	24.9	24.68	10.5	6.7	74.75	814
	MCO-455.11-120	11kV	120	26.5	29.62	11.5	6.8	79	971
	MCO-455.11-150	11kV	150	28.2	39.49	12.6	6.9	83.19	1127



FEICHUN SPECIAL CABLES

Website Address www.feichuncables.com
 Whatsapp Account **+86 138 5608 5607 & +86 138 5512 3218**
 Email Address ziyu.huang@feichuncables.com & zihao.yang@feichuncables.com